


ISO Standard 80601-2-80:2018

Table 201.105 — Pressure-controlled breath TYPE TEST settings


Test number	Intended DELIVERED VOLUME ^a (ml)	Test lung parameters			VENTILATORY SUPPORT EQUIPMENT settings			
		Compliance (ml(hPa) ⁻¹) ± 10 %	Linear ^{[11][12][13]} resistance (hPa(l/s) ⁻¹) ±10 %	Leakage ^b (ml/min) ±10 %	Ventilatory frequency ^c (breaths/min)	Inspiratory time ^d (s)	Pressure ^e (hPa)	PEEP (hPa)
1	500	50	5	0	20	1	10	5
2	500	50	20	0	12	1	15	10
3	500	20	5	0	20	1	25	5
4	500	20	20	0	20	1	25	10
5	500	50	5	5 000	20	1	25	5
6	500	50	20	10 000	12	1	25	10
7	300	20	20	0	20	1	15	5
8	300	20	50	0	12	1	25	10
9	300	10	50	0	20	1	30	5
10	300	20	20	3 000	20	1	25	5
11	300	20	50	6 000	12	1	25	10
12	200	10	20	0	20	1	25	10

Tests on following pages are conducted per the settings in the list above.


TEST 1

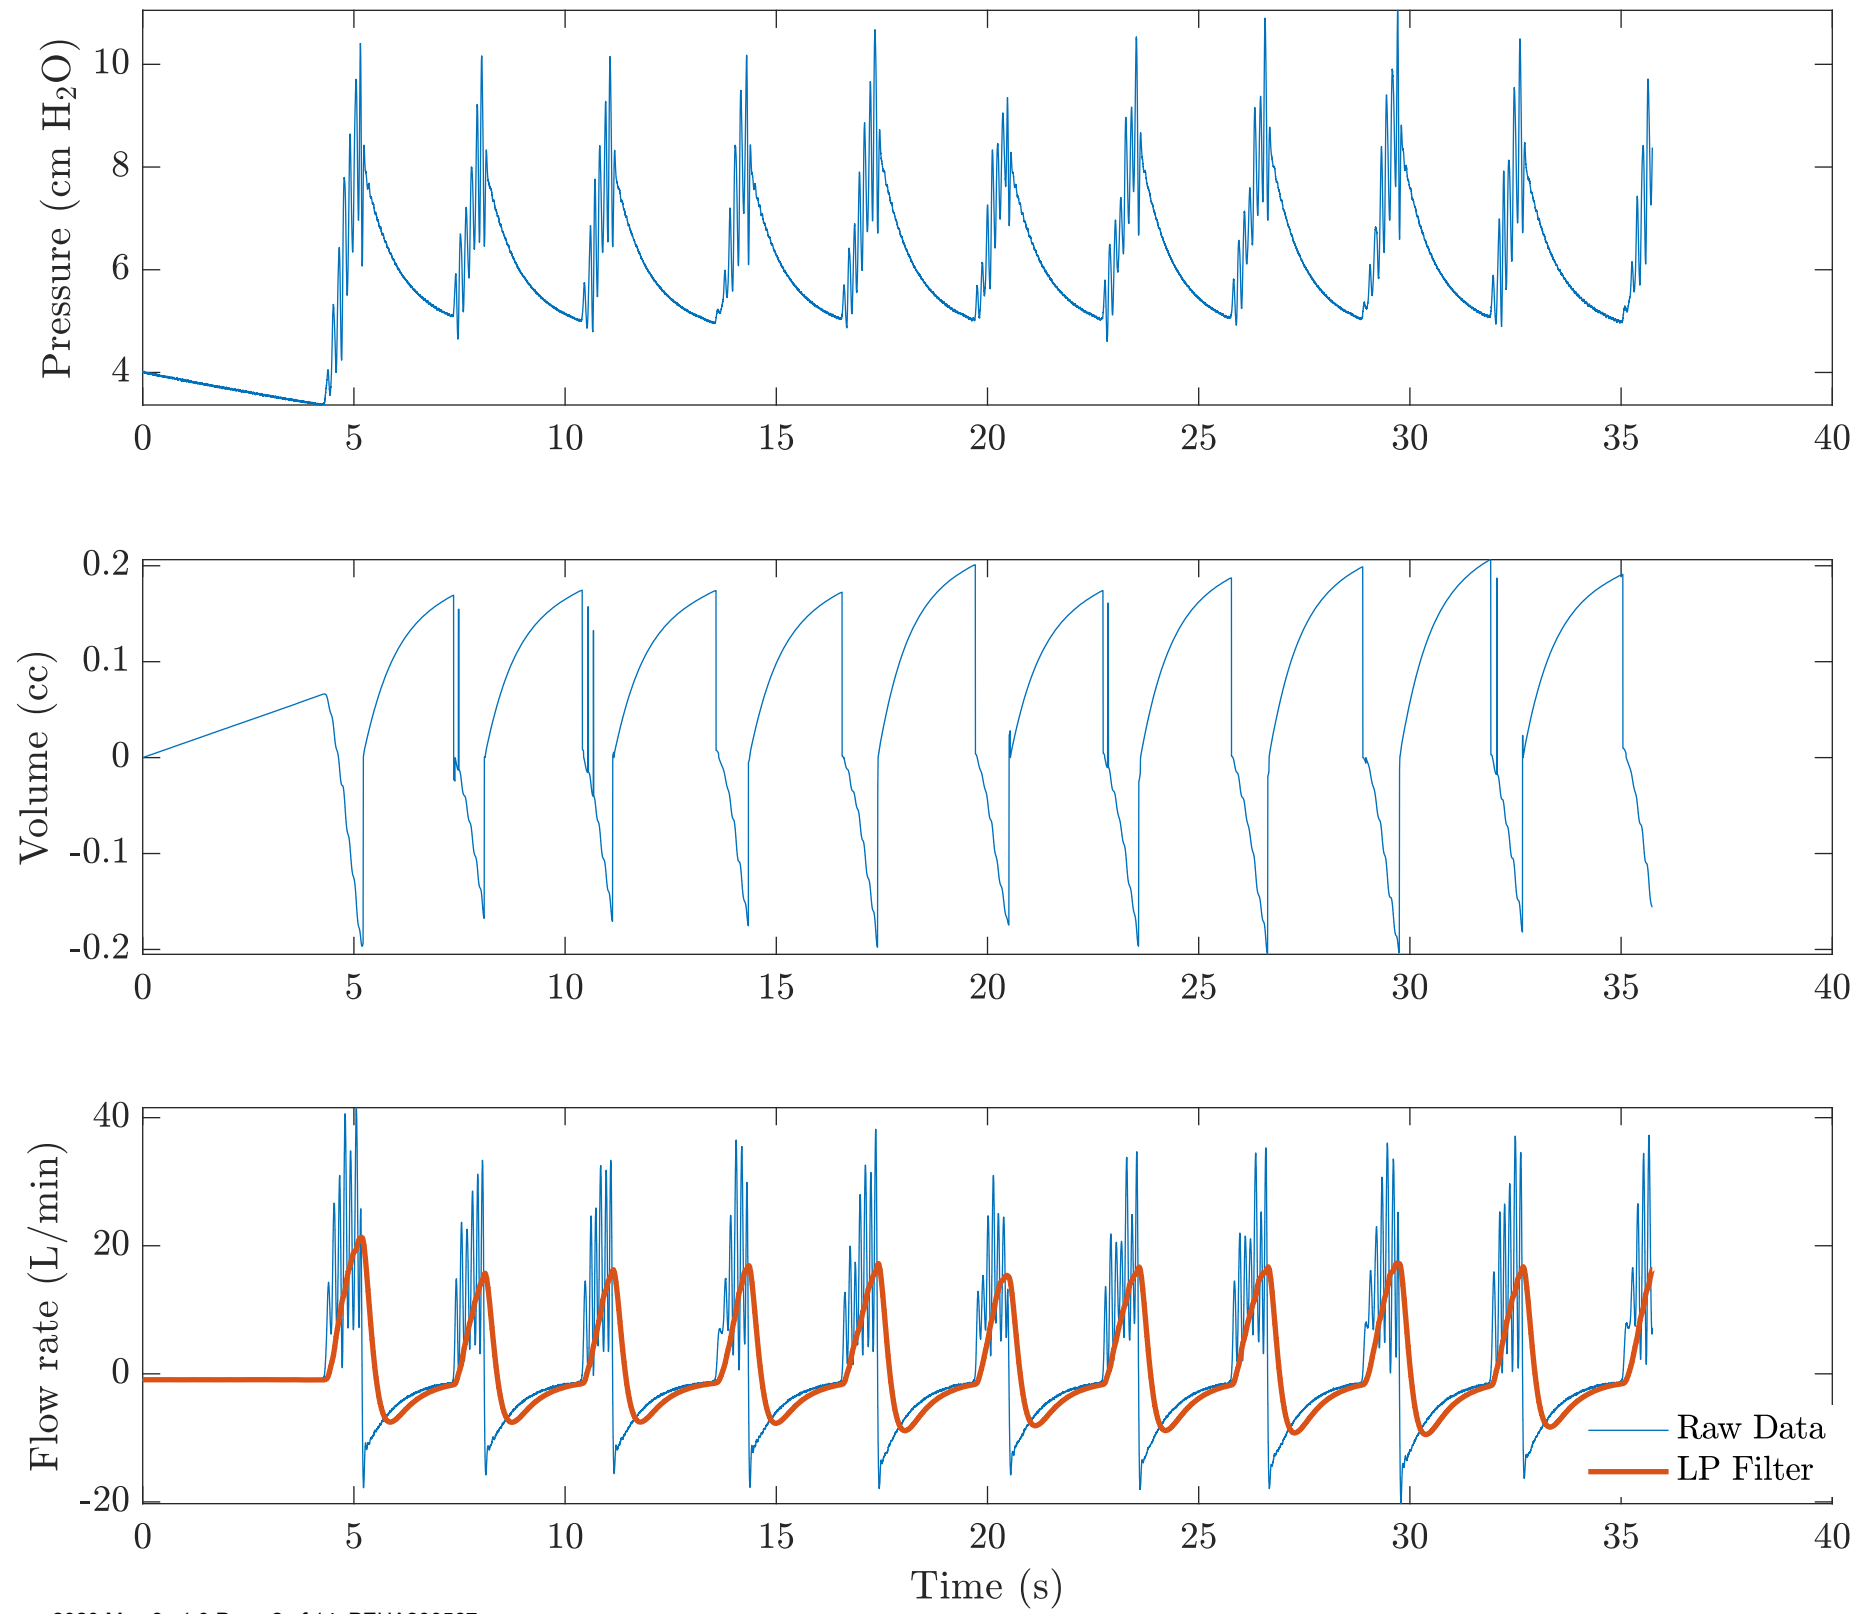


TEST 2

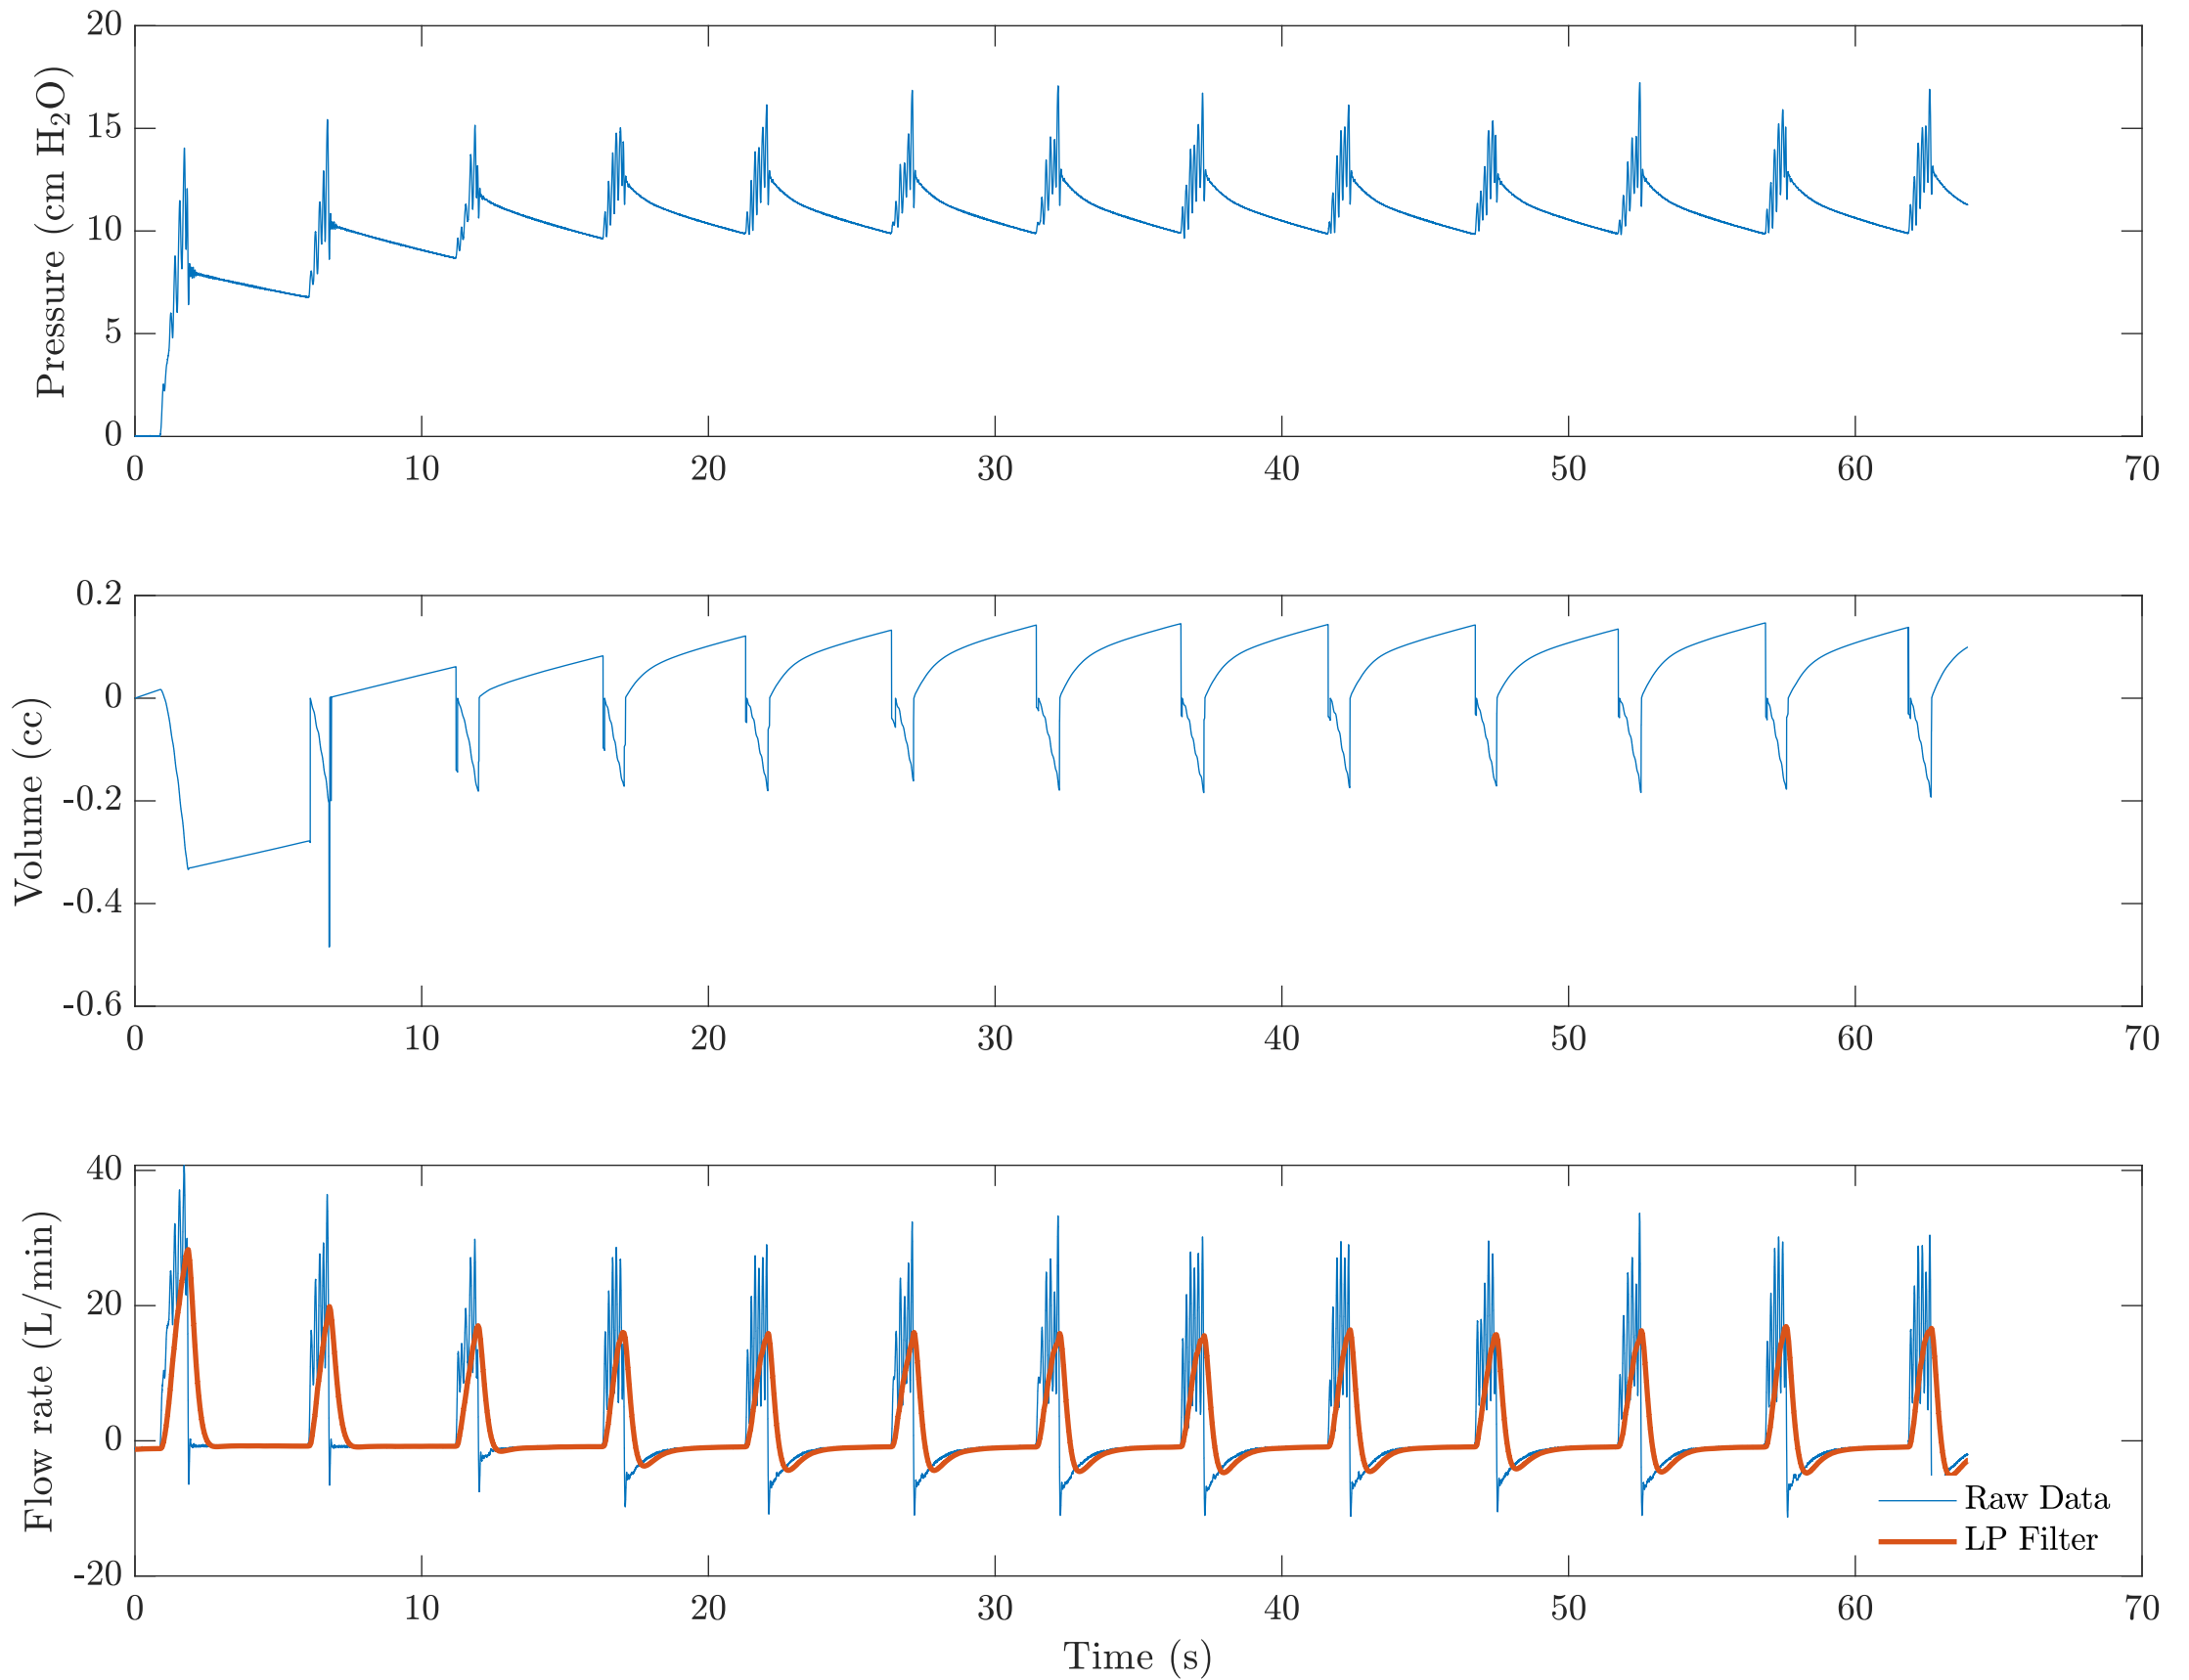


TEST 3

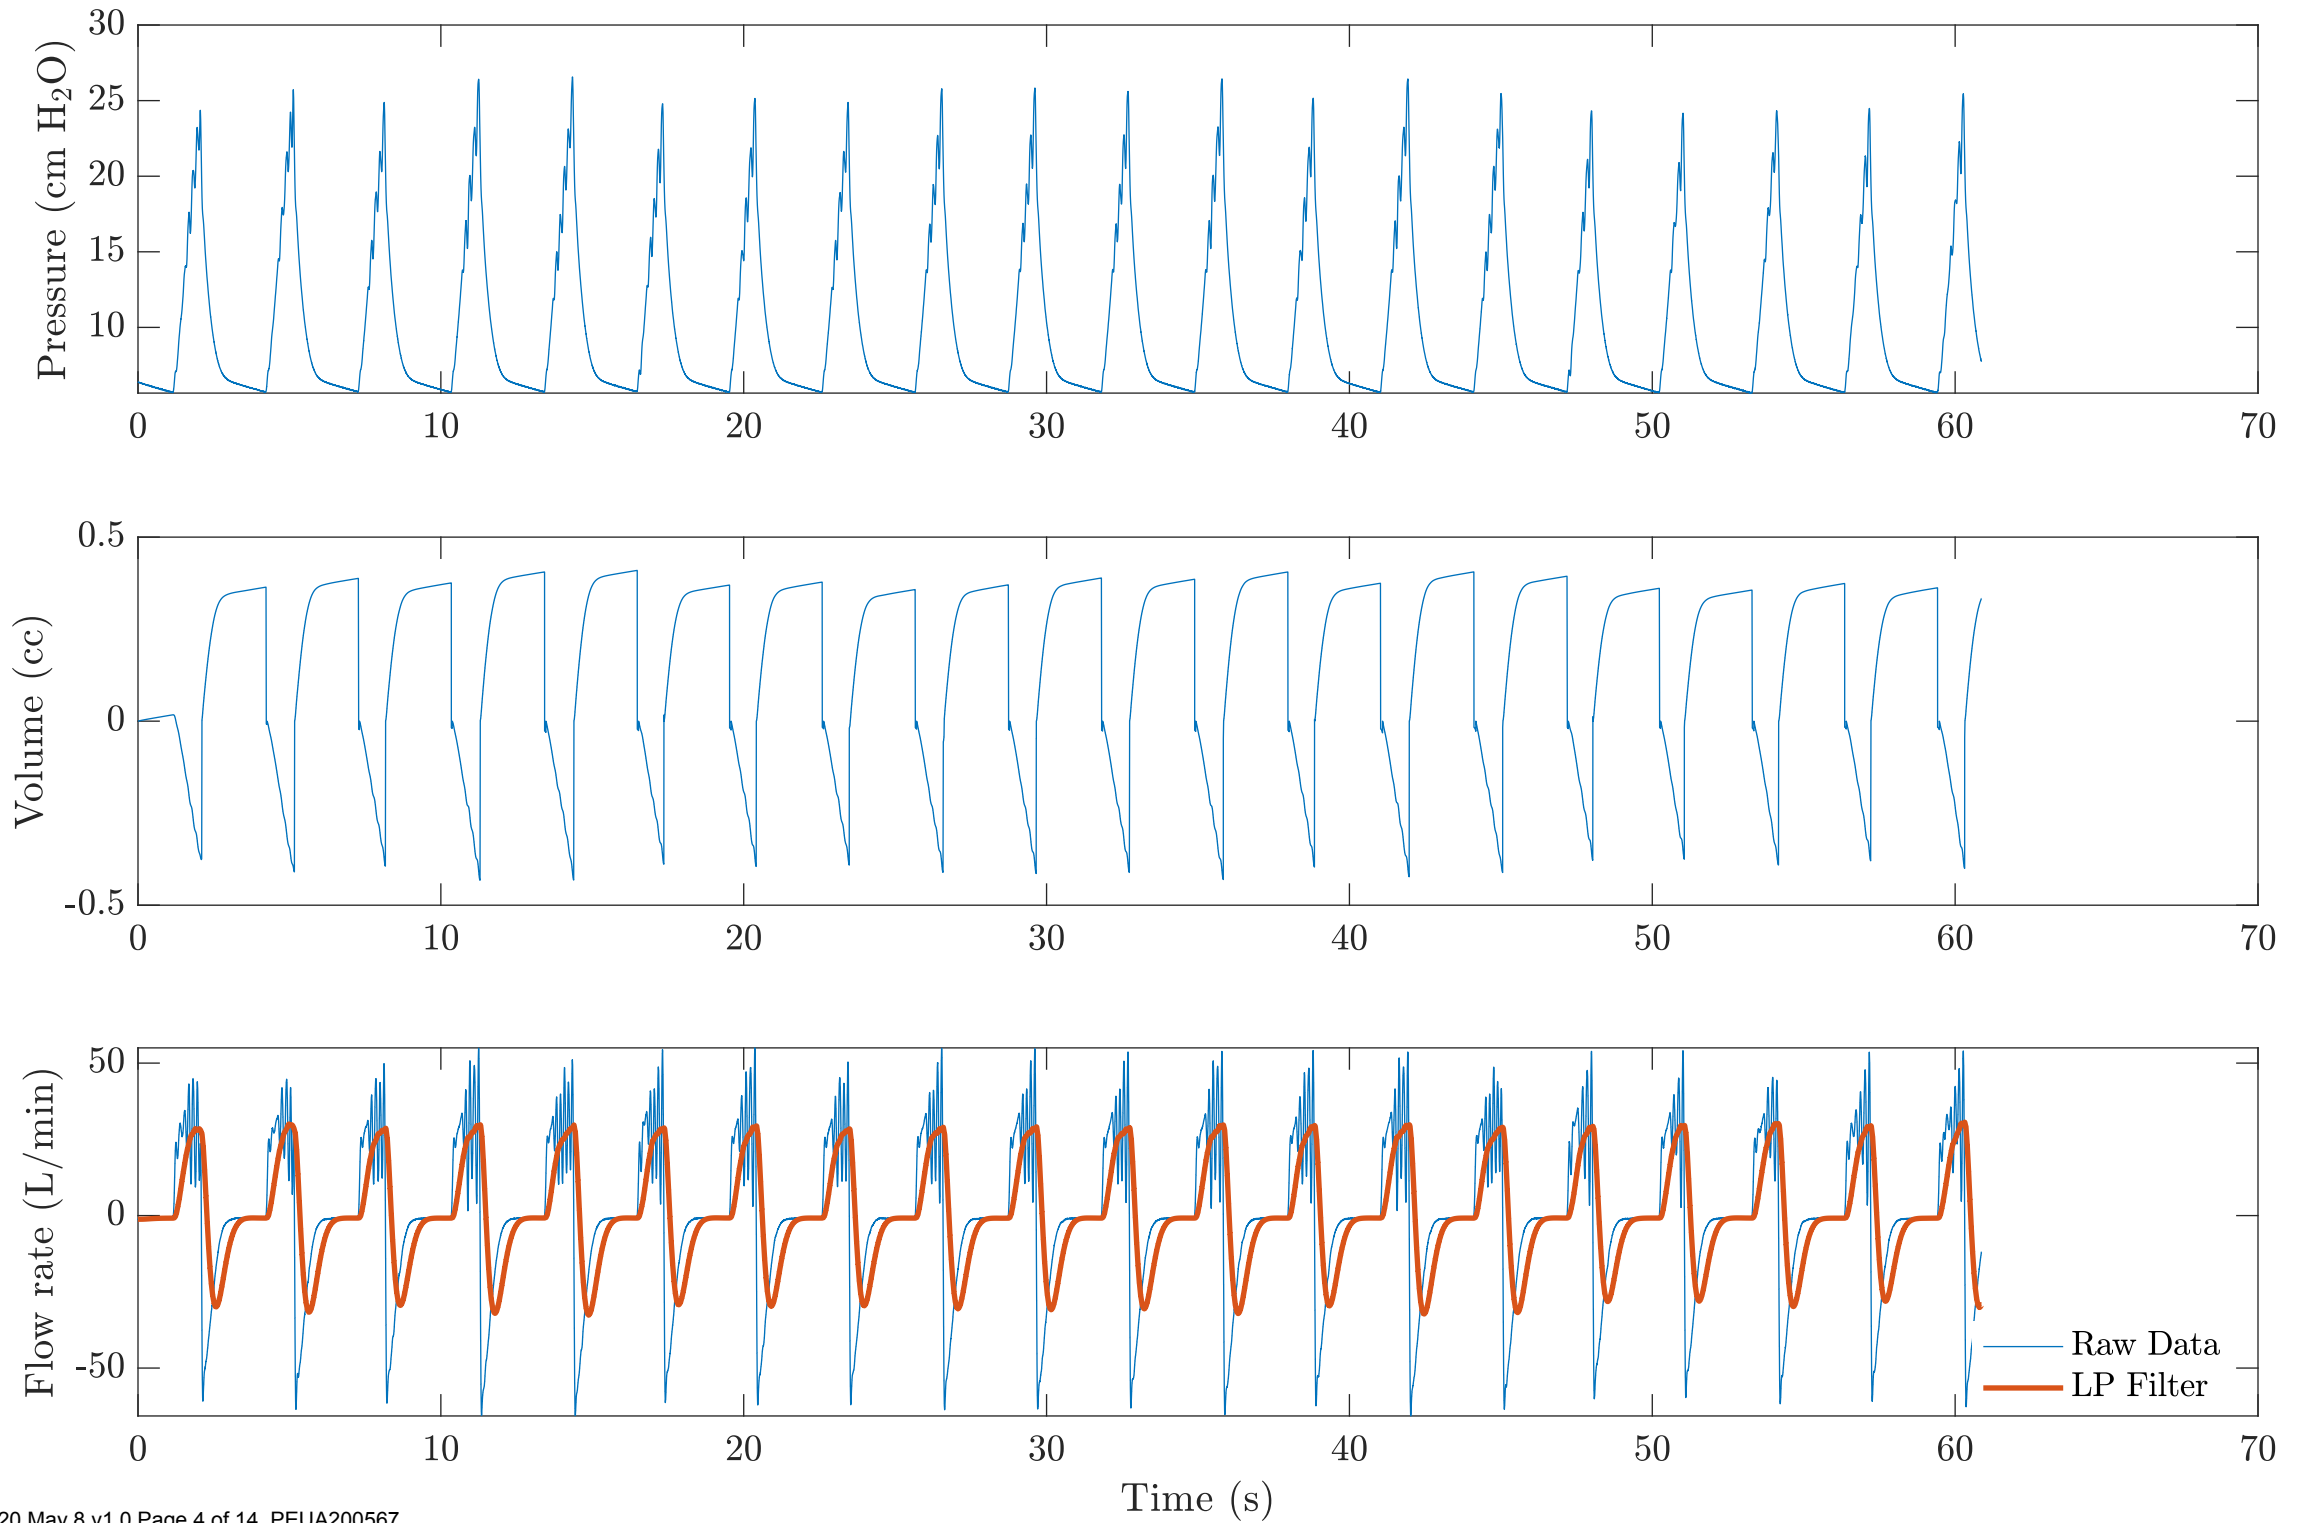


TEST 4

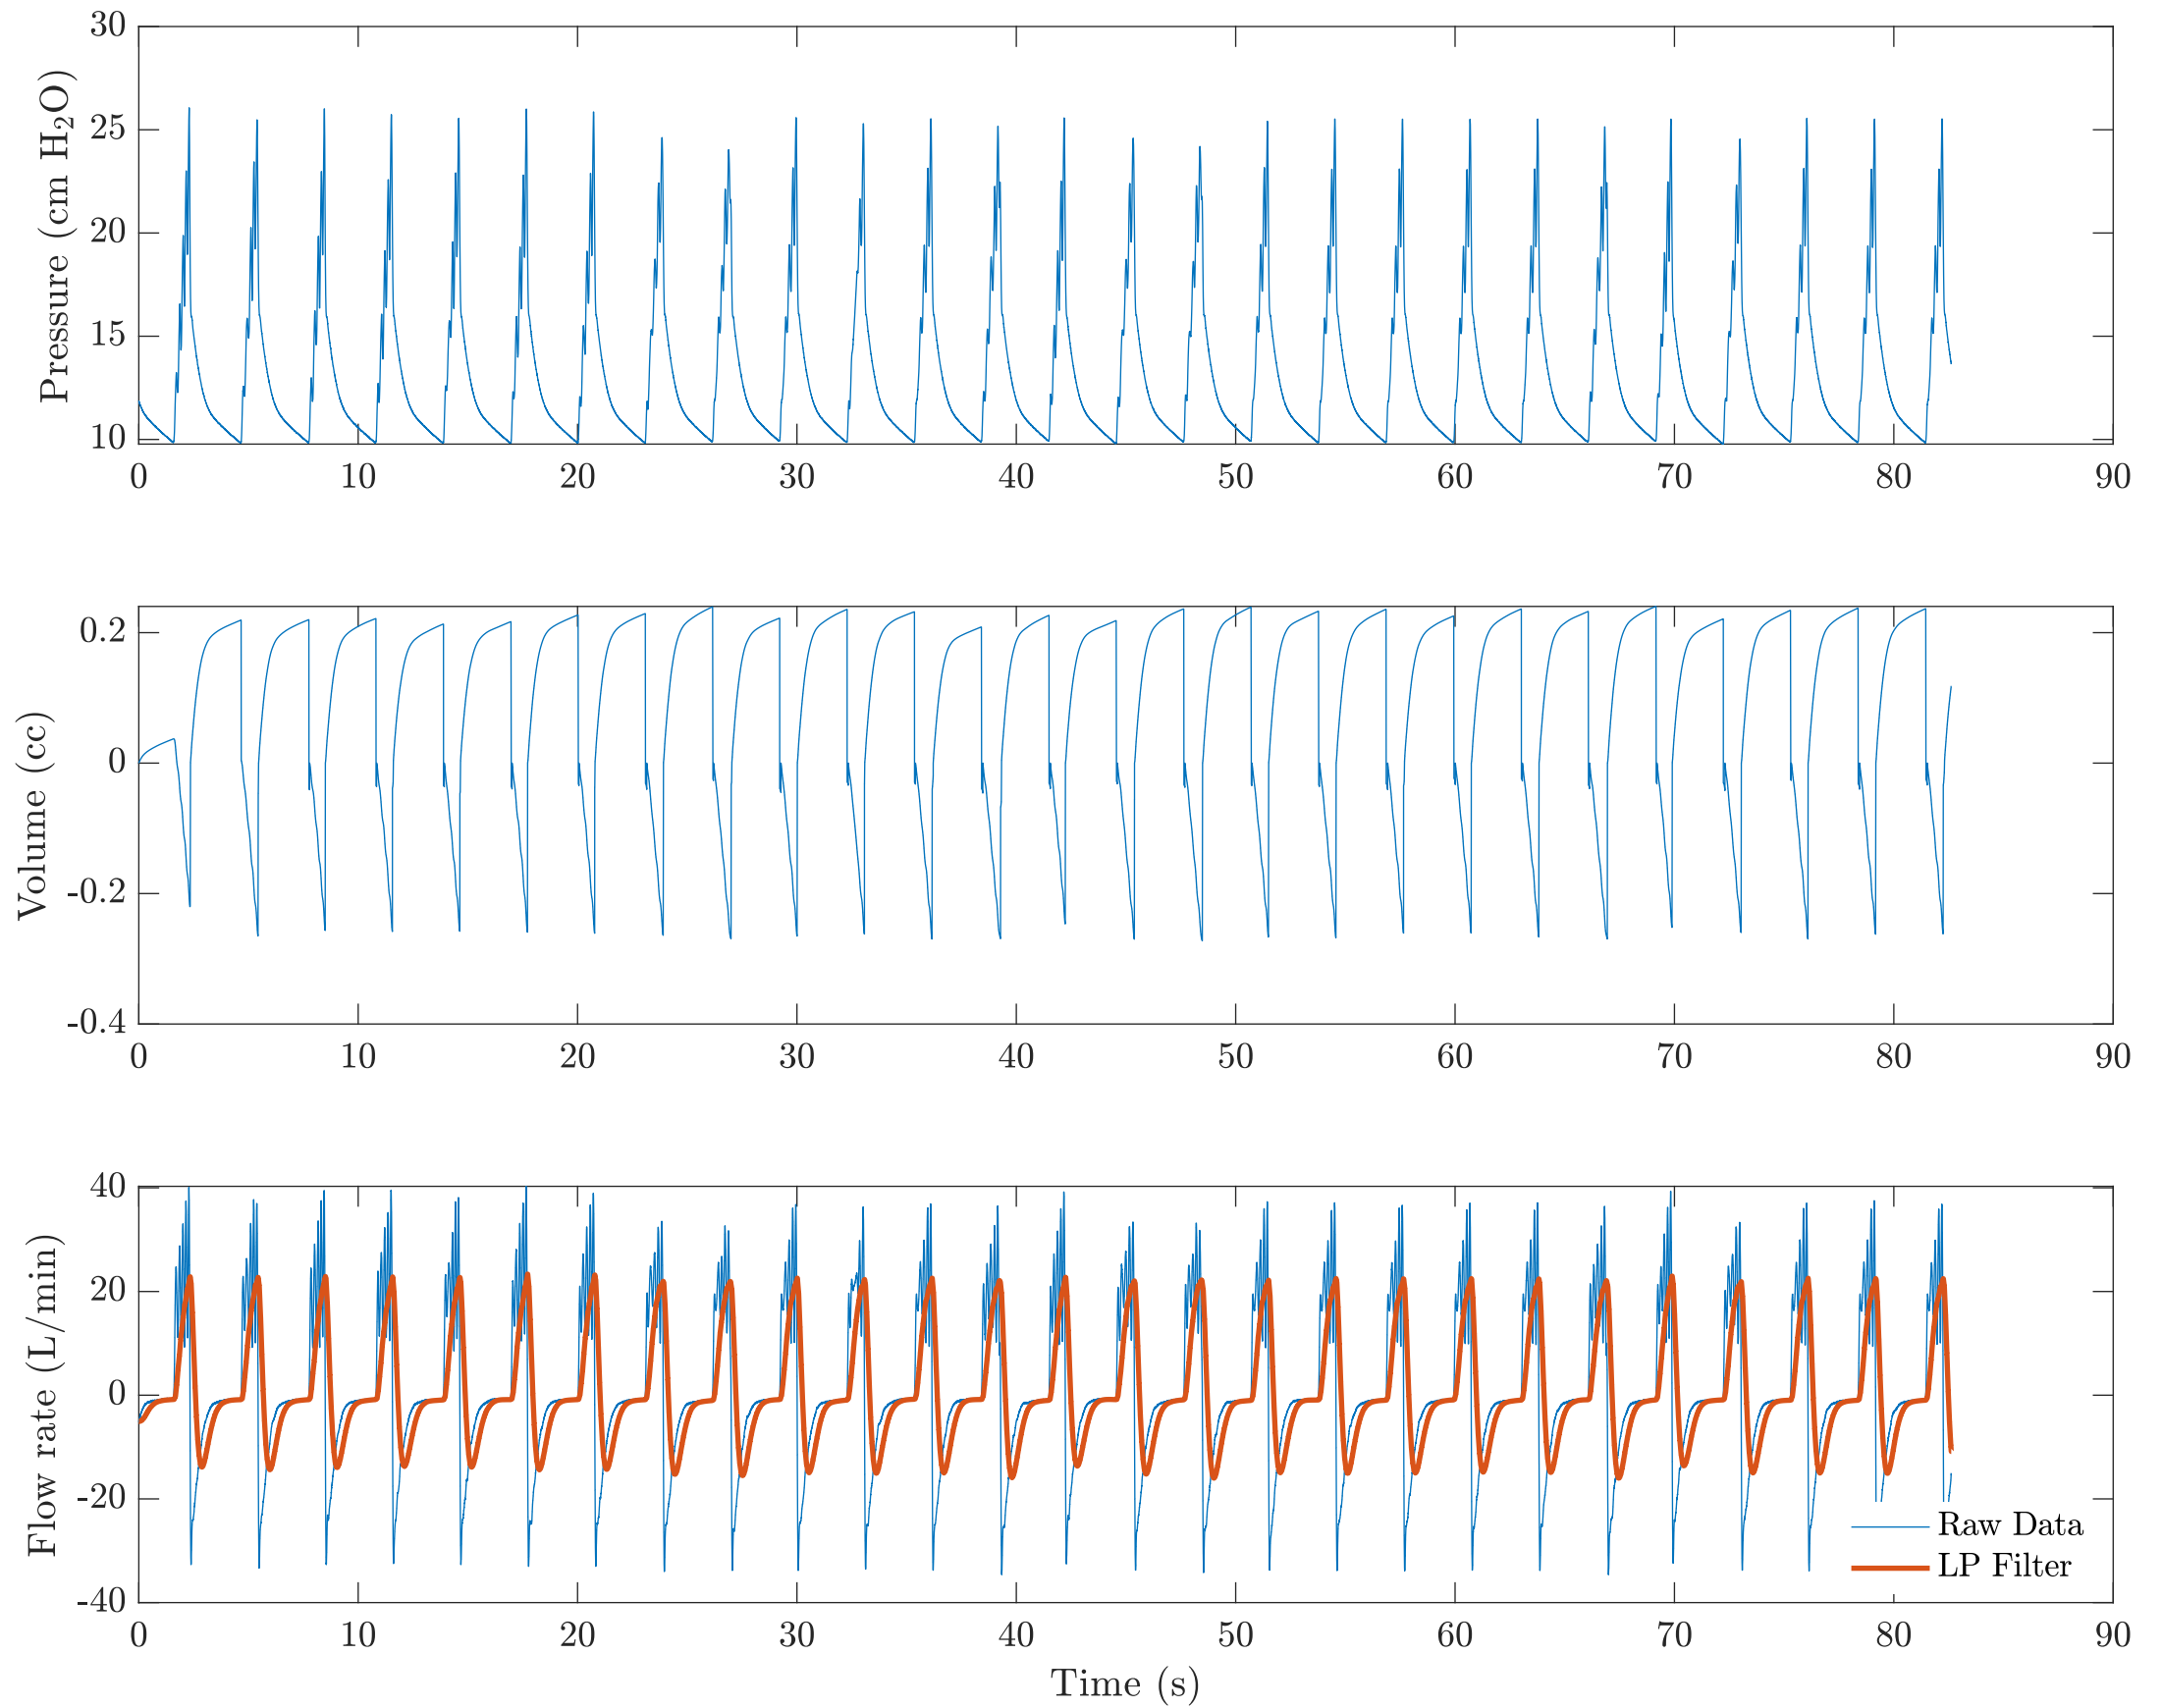


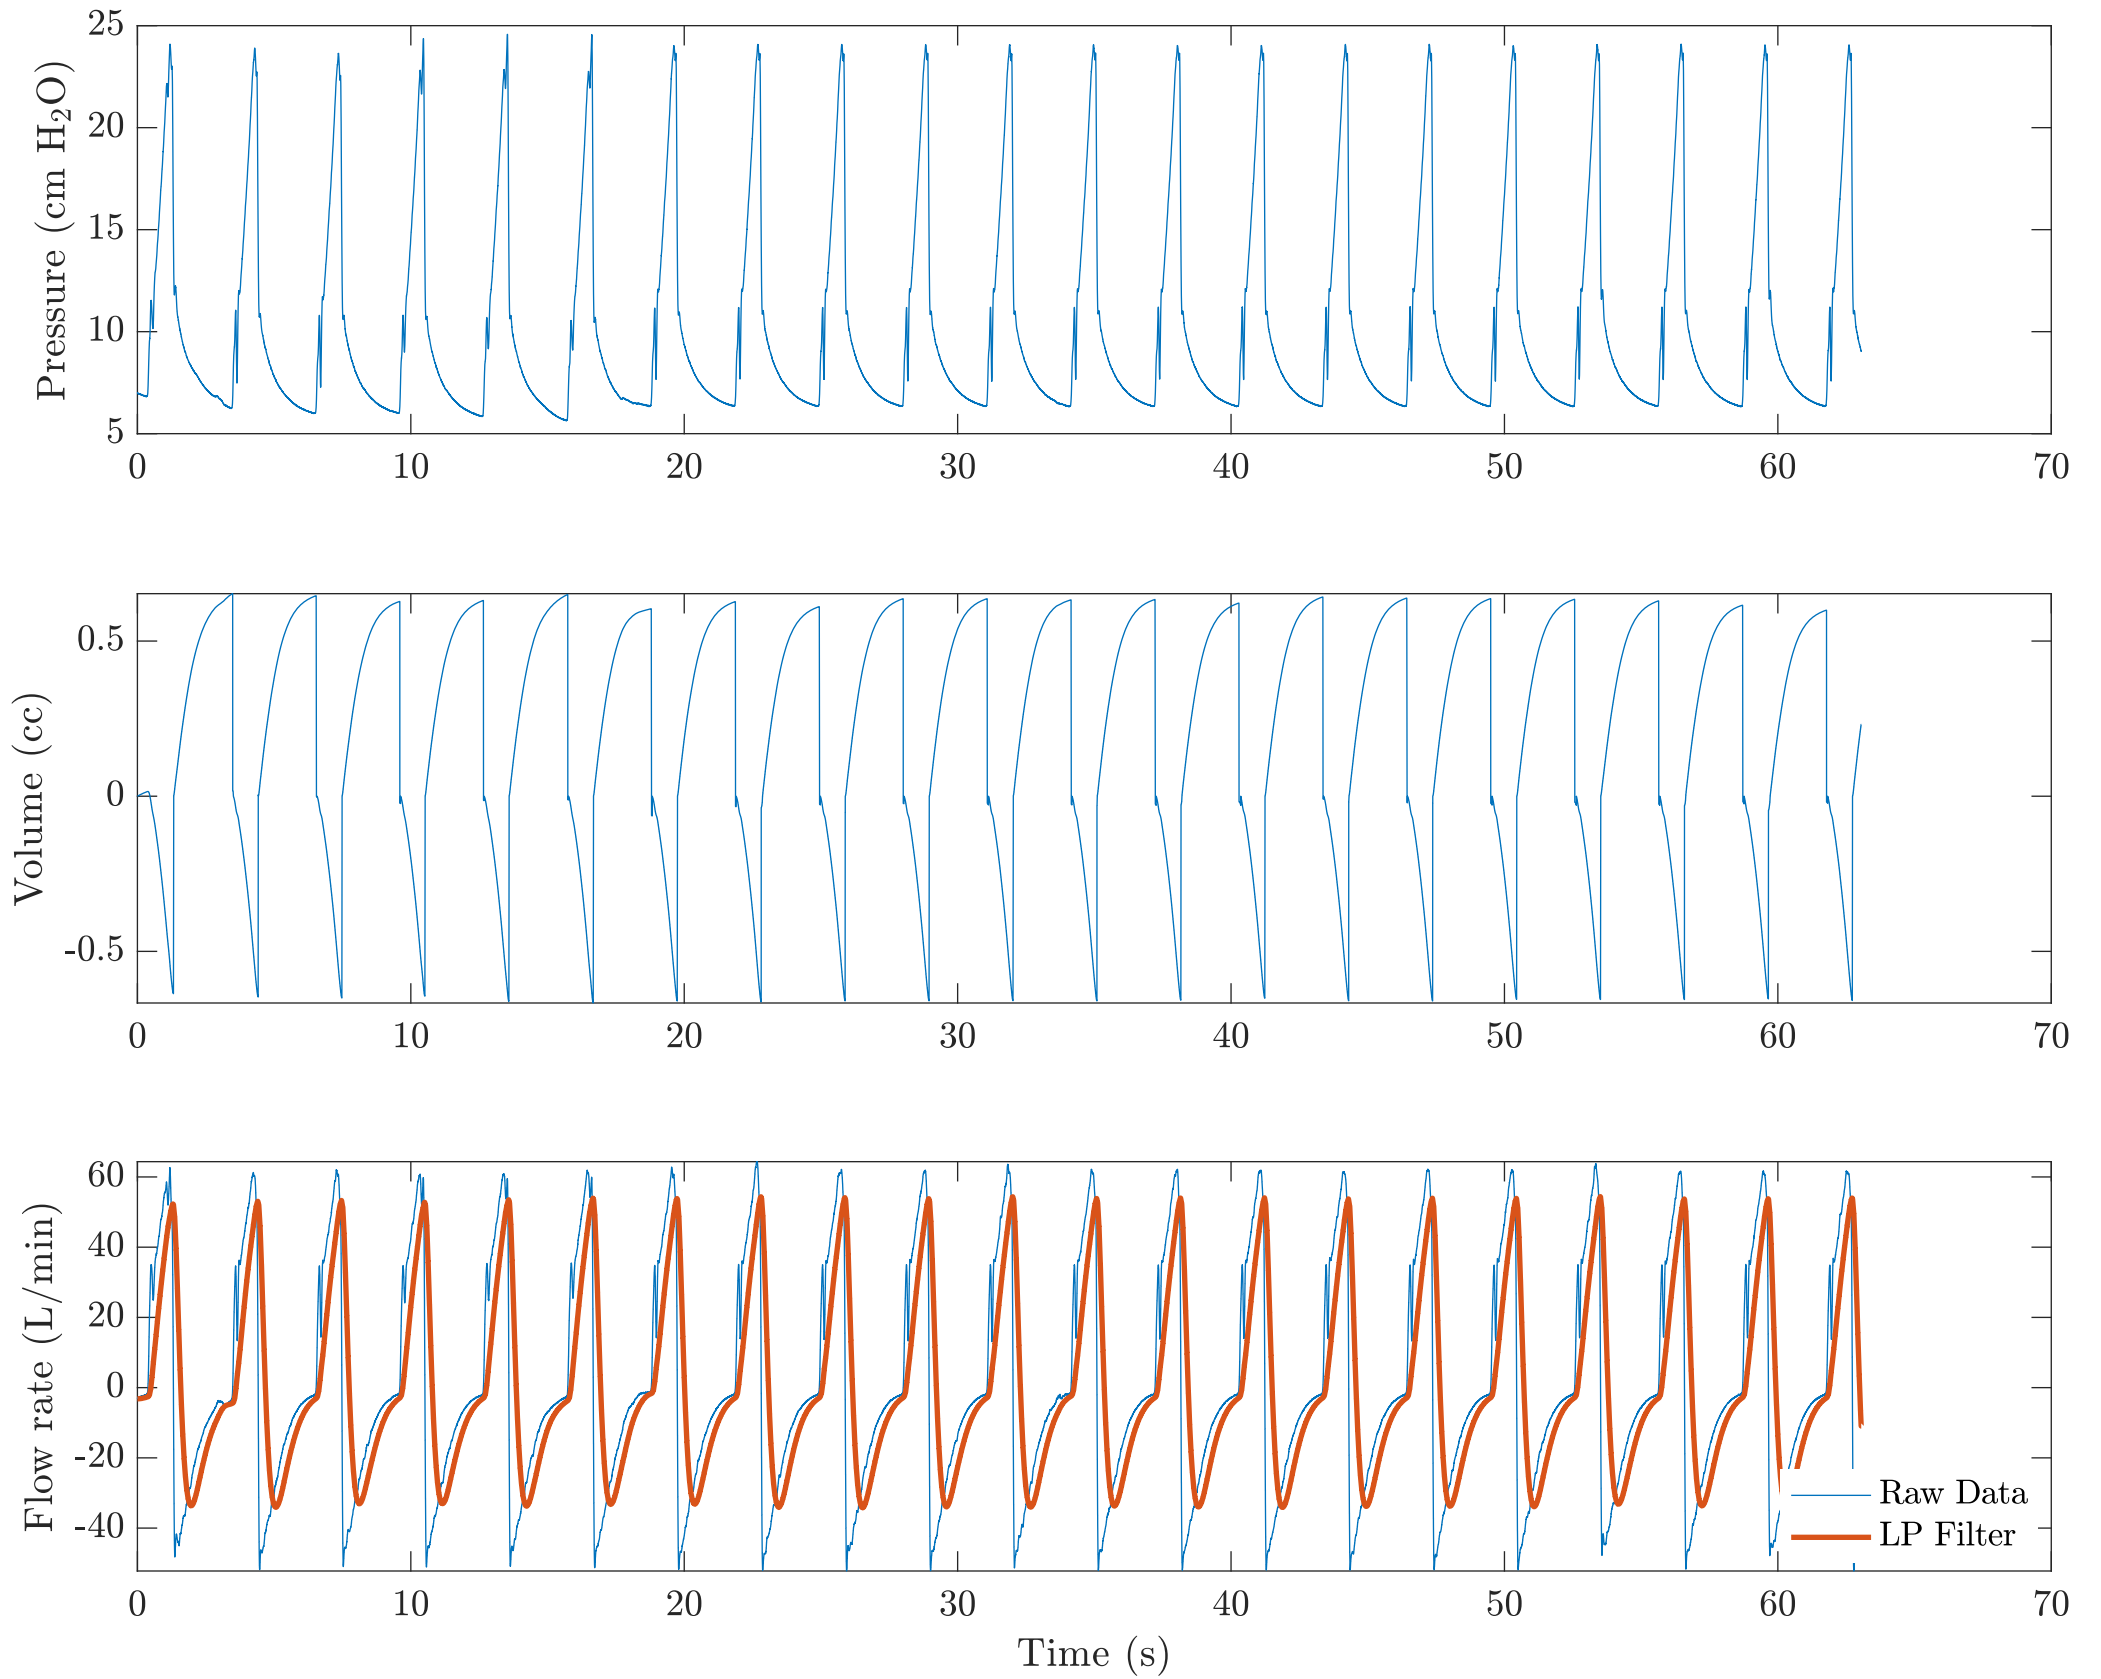


TEST 6

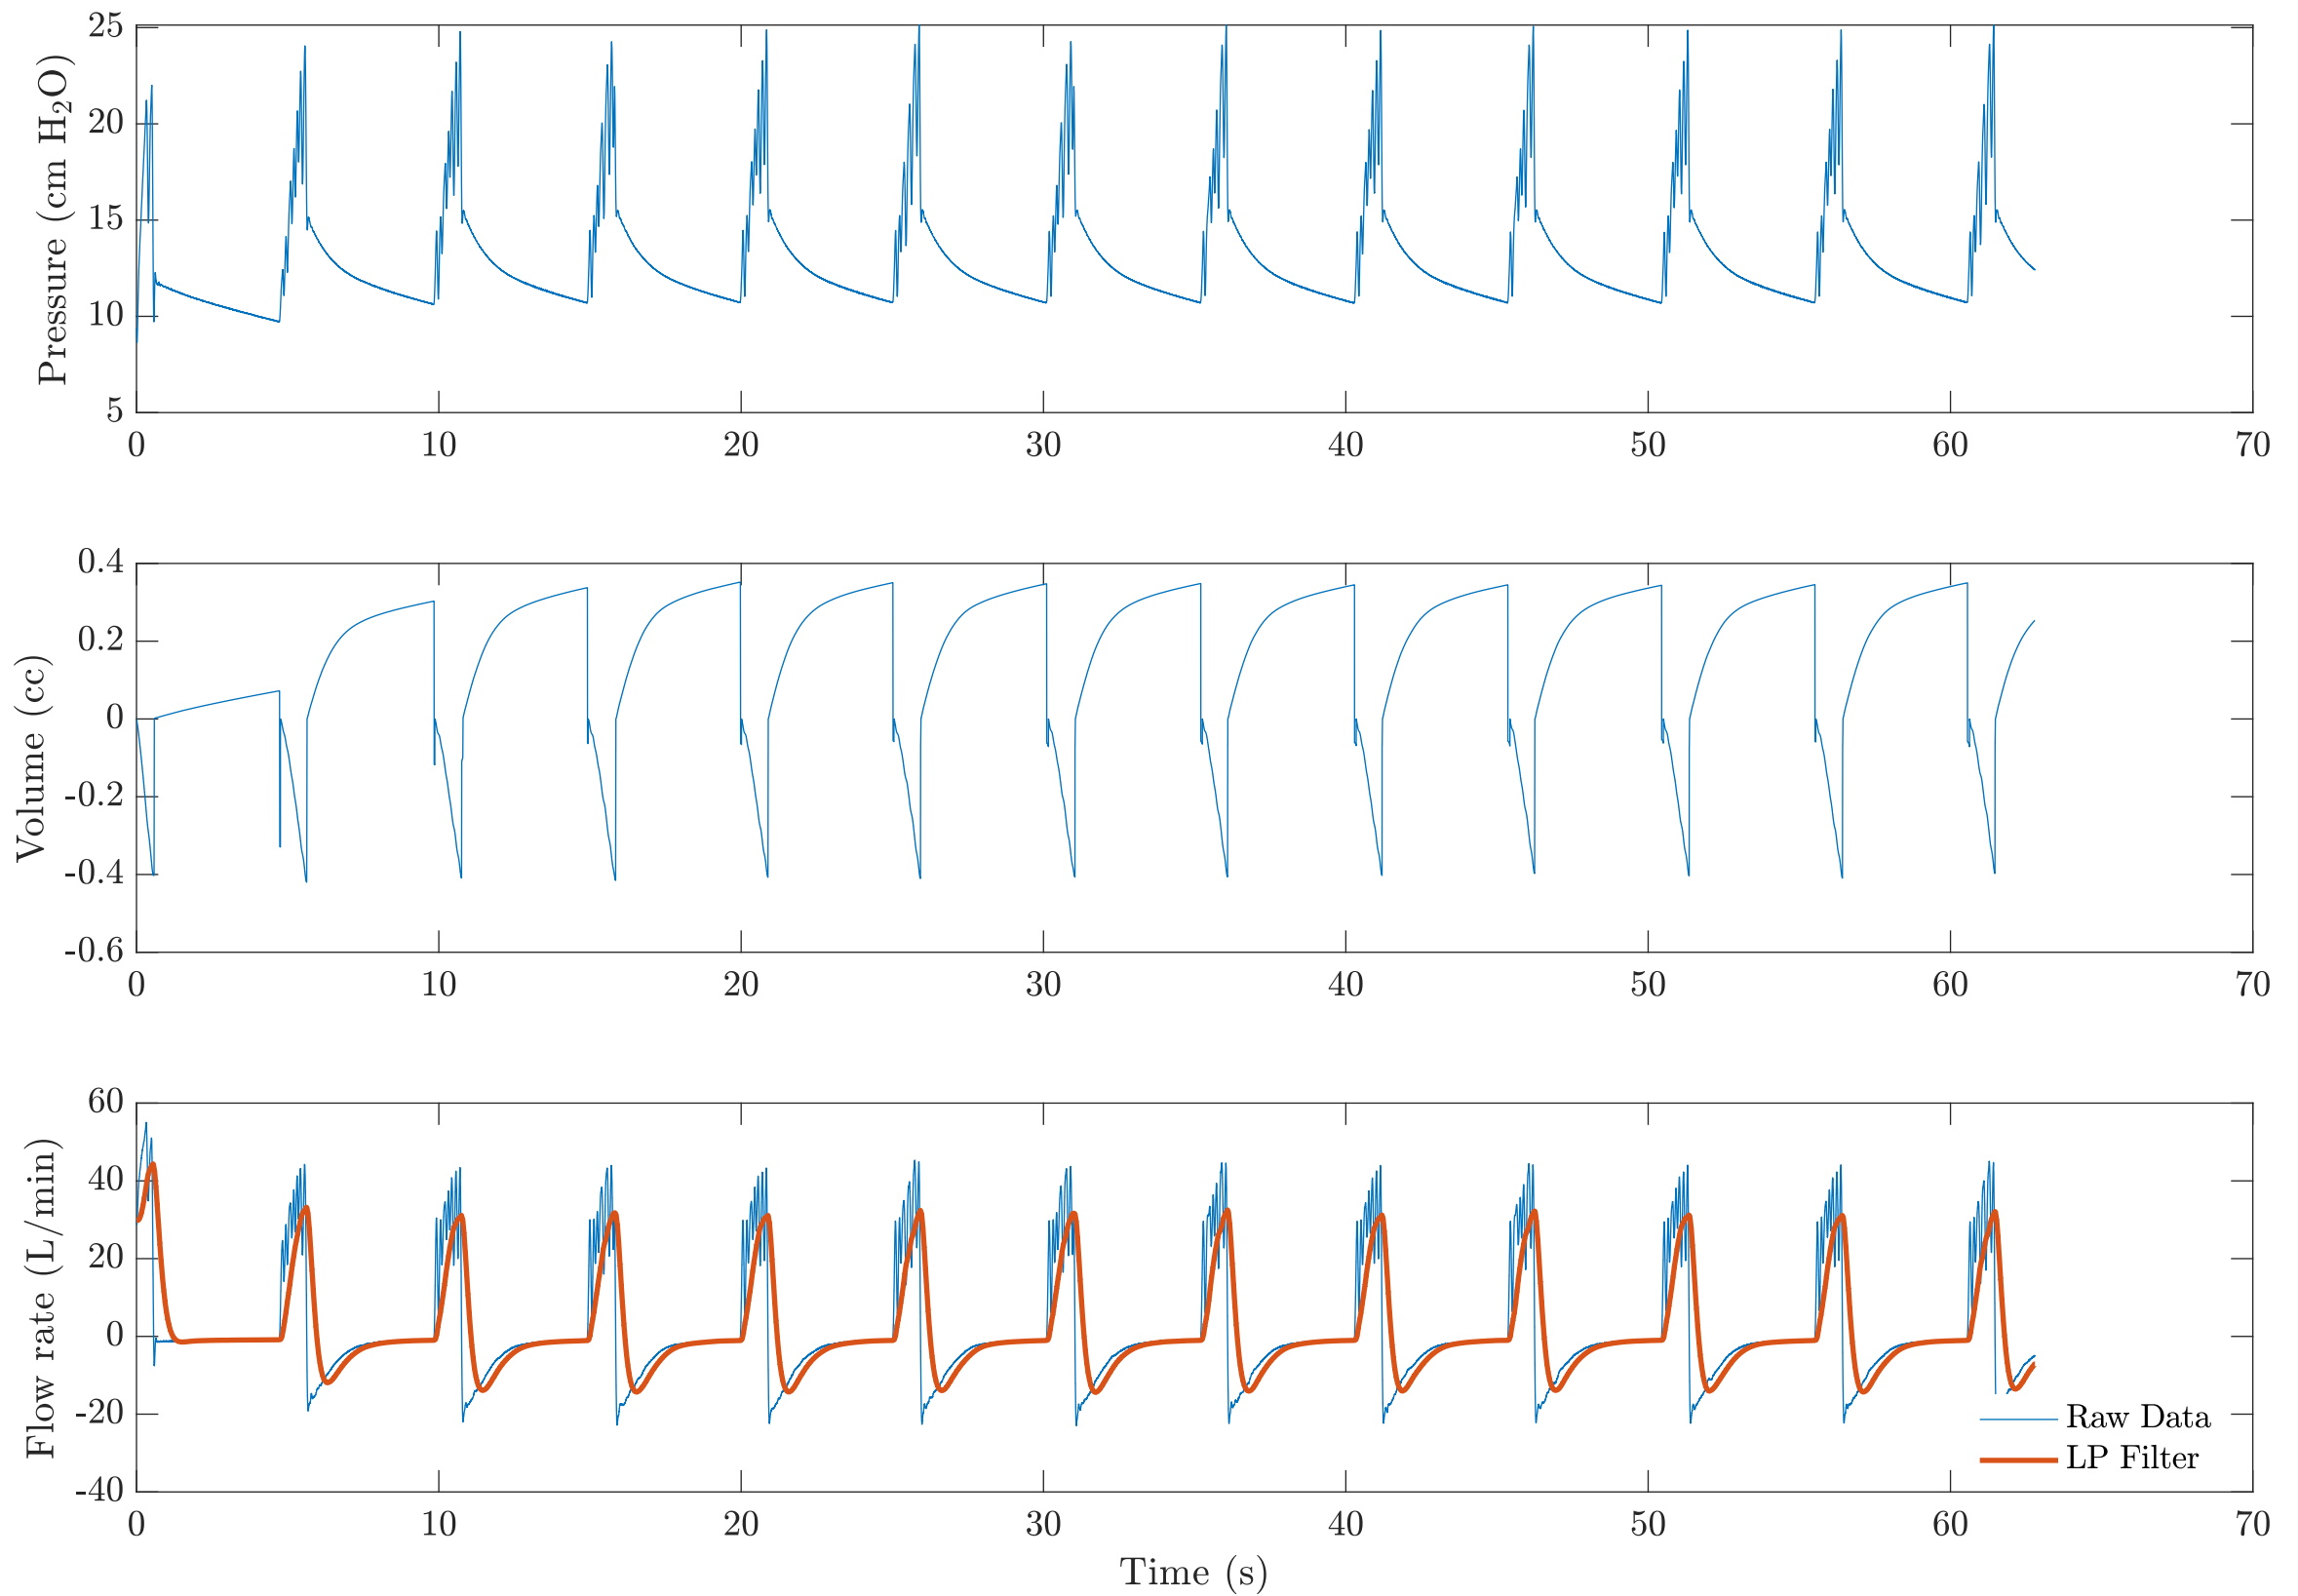


TEST 7

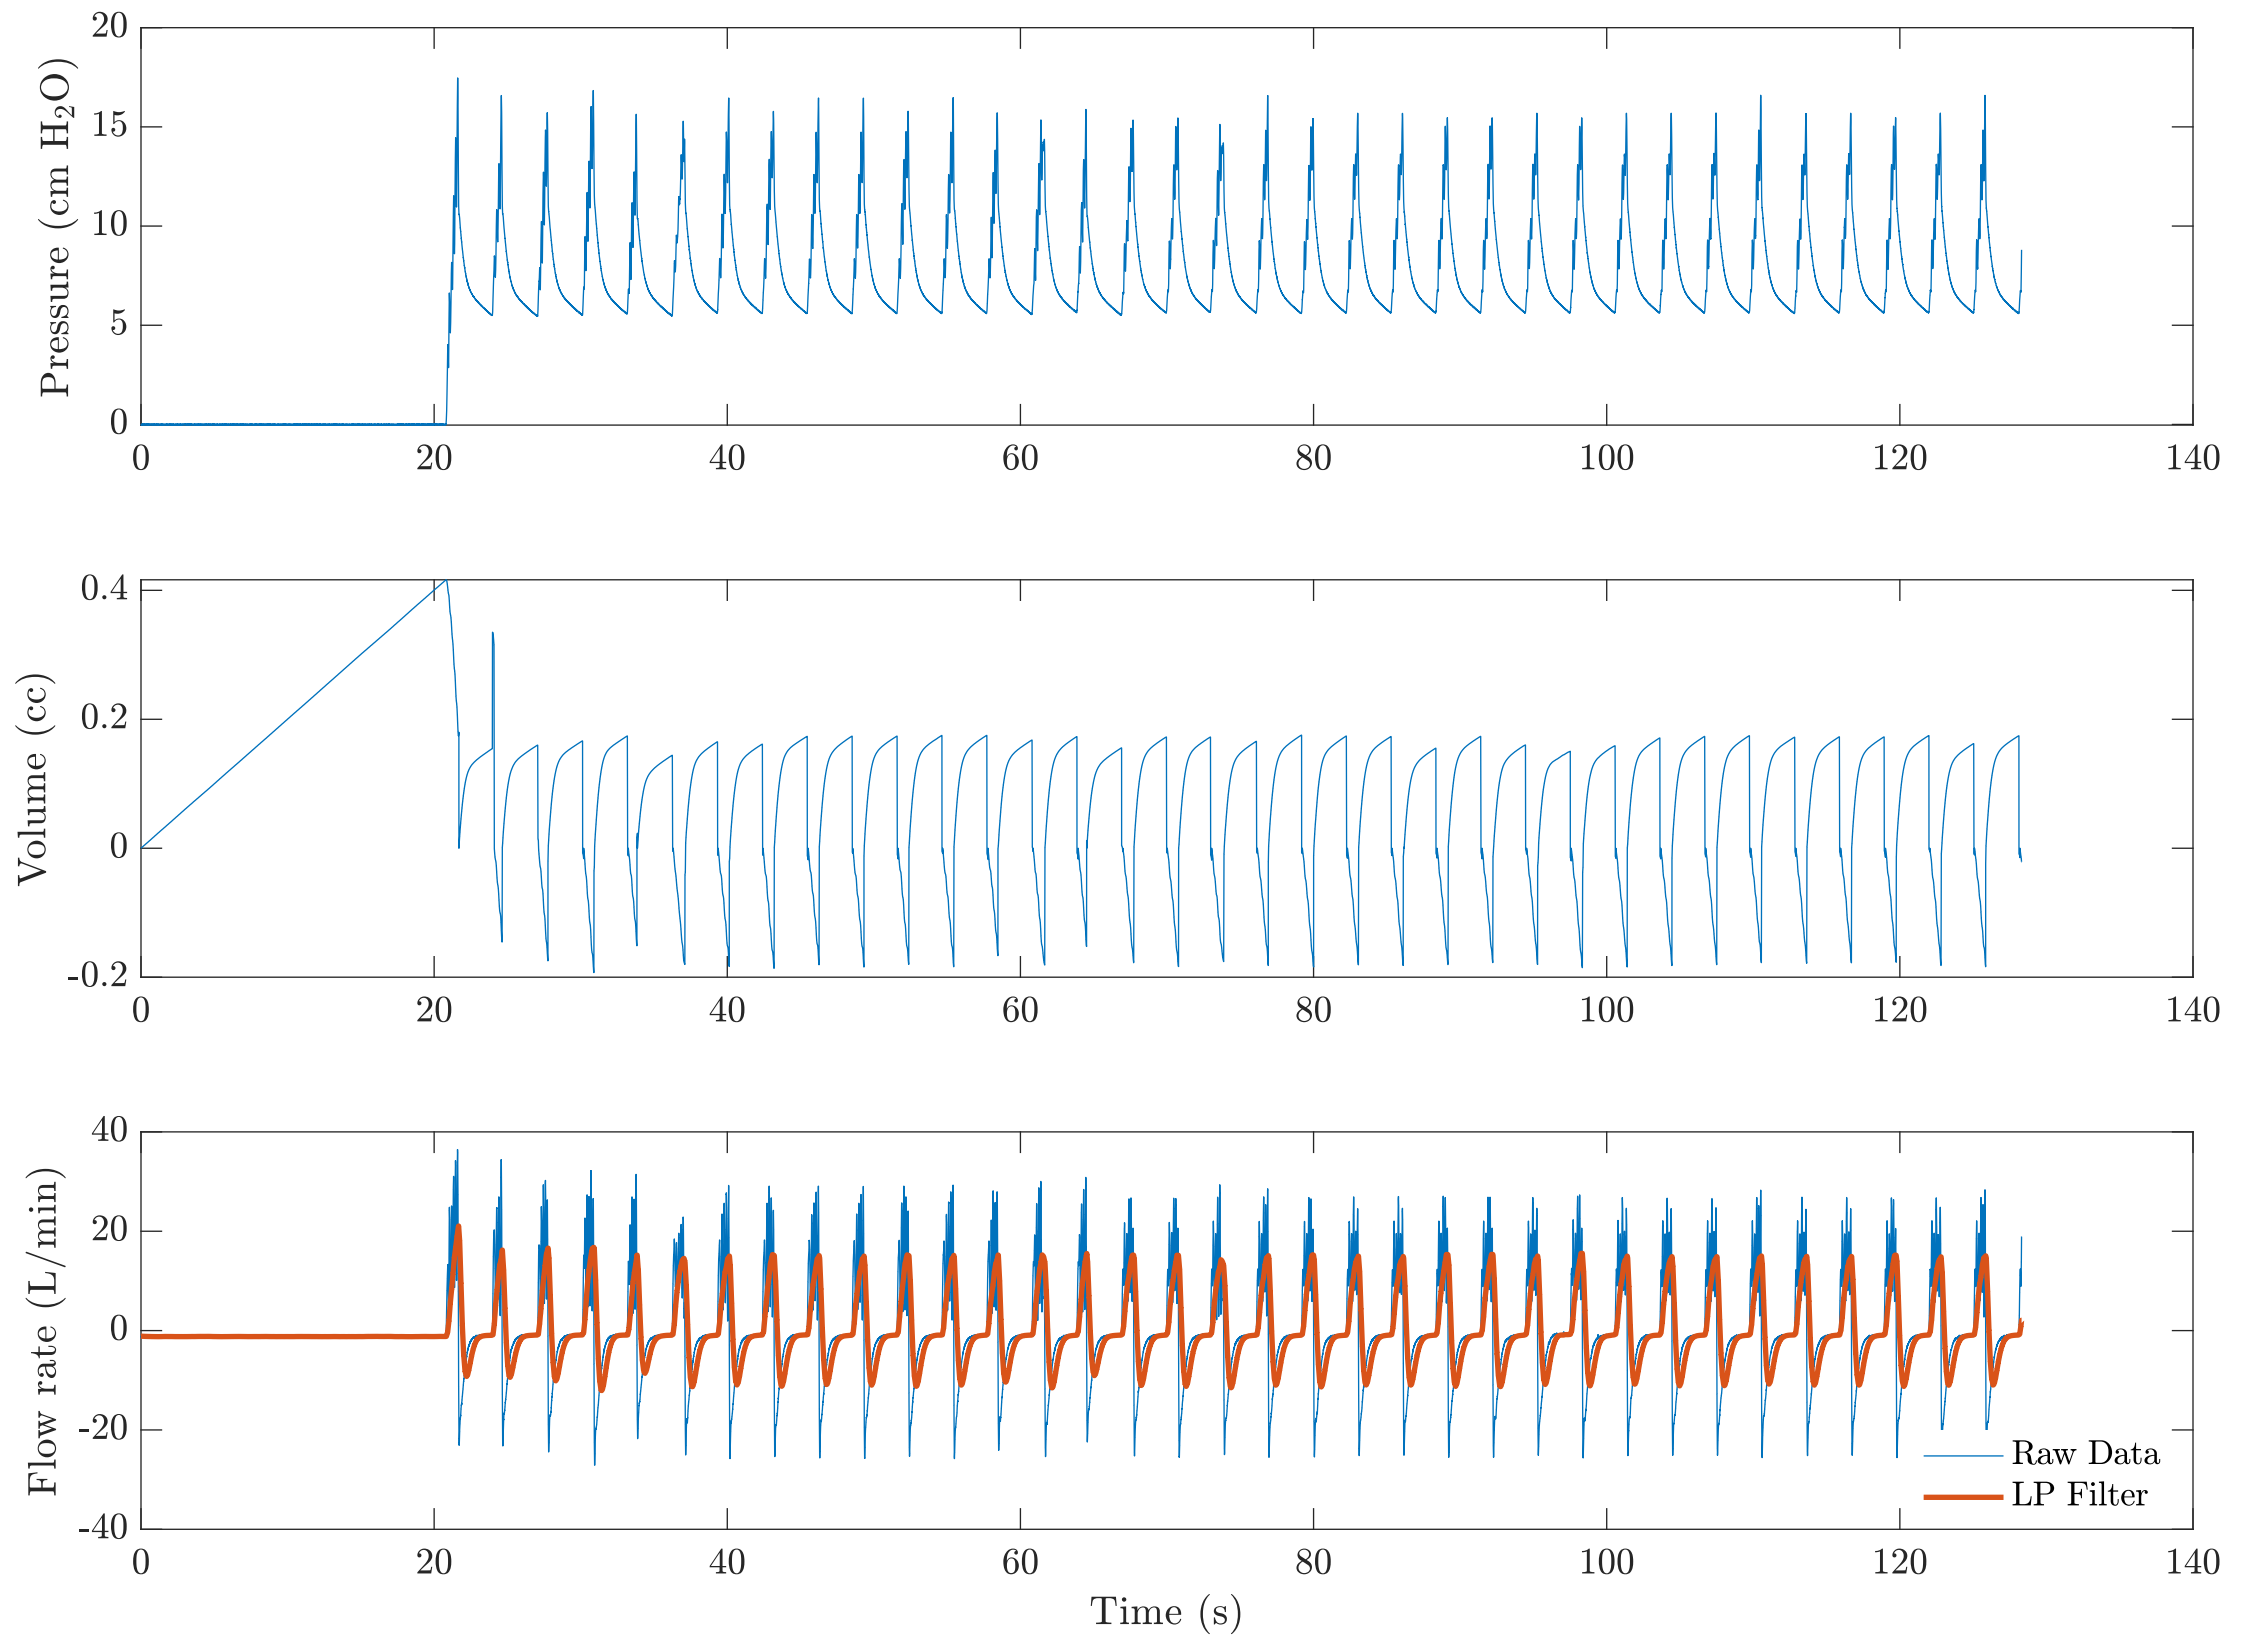

TEST 8

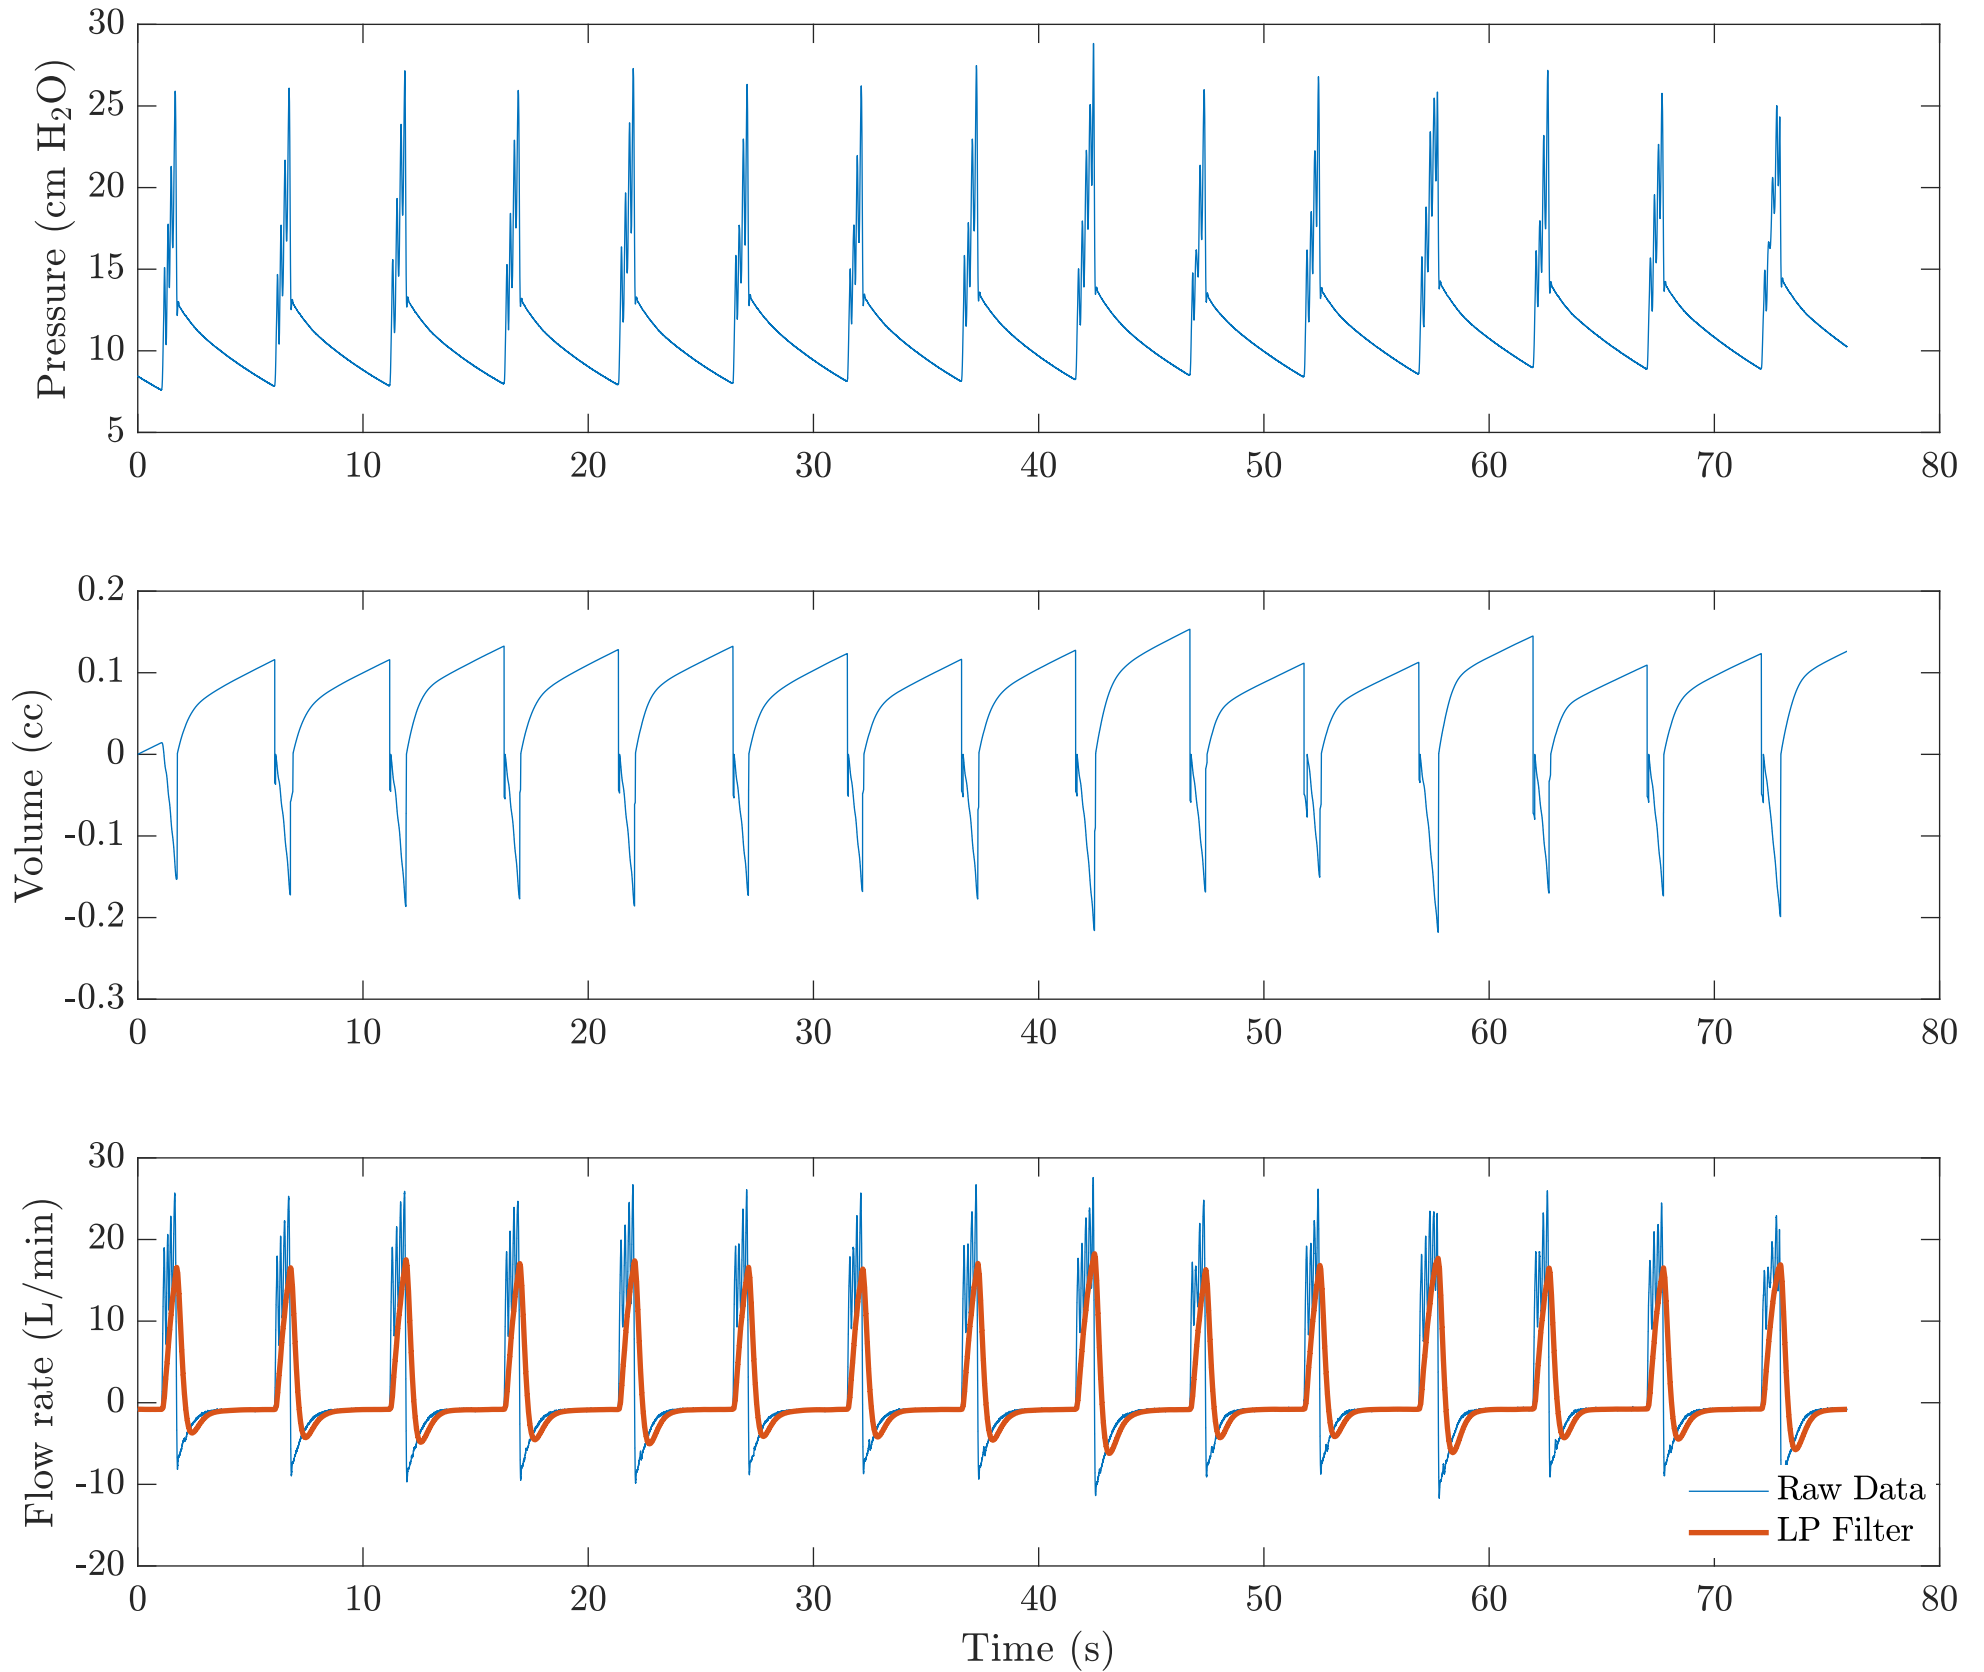

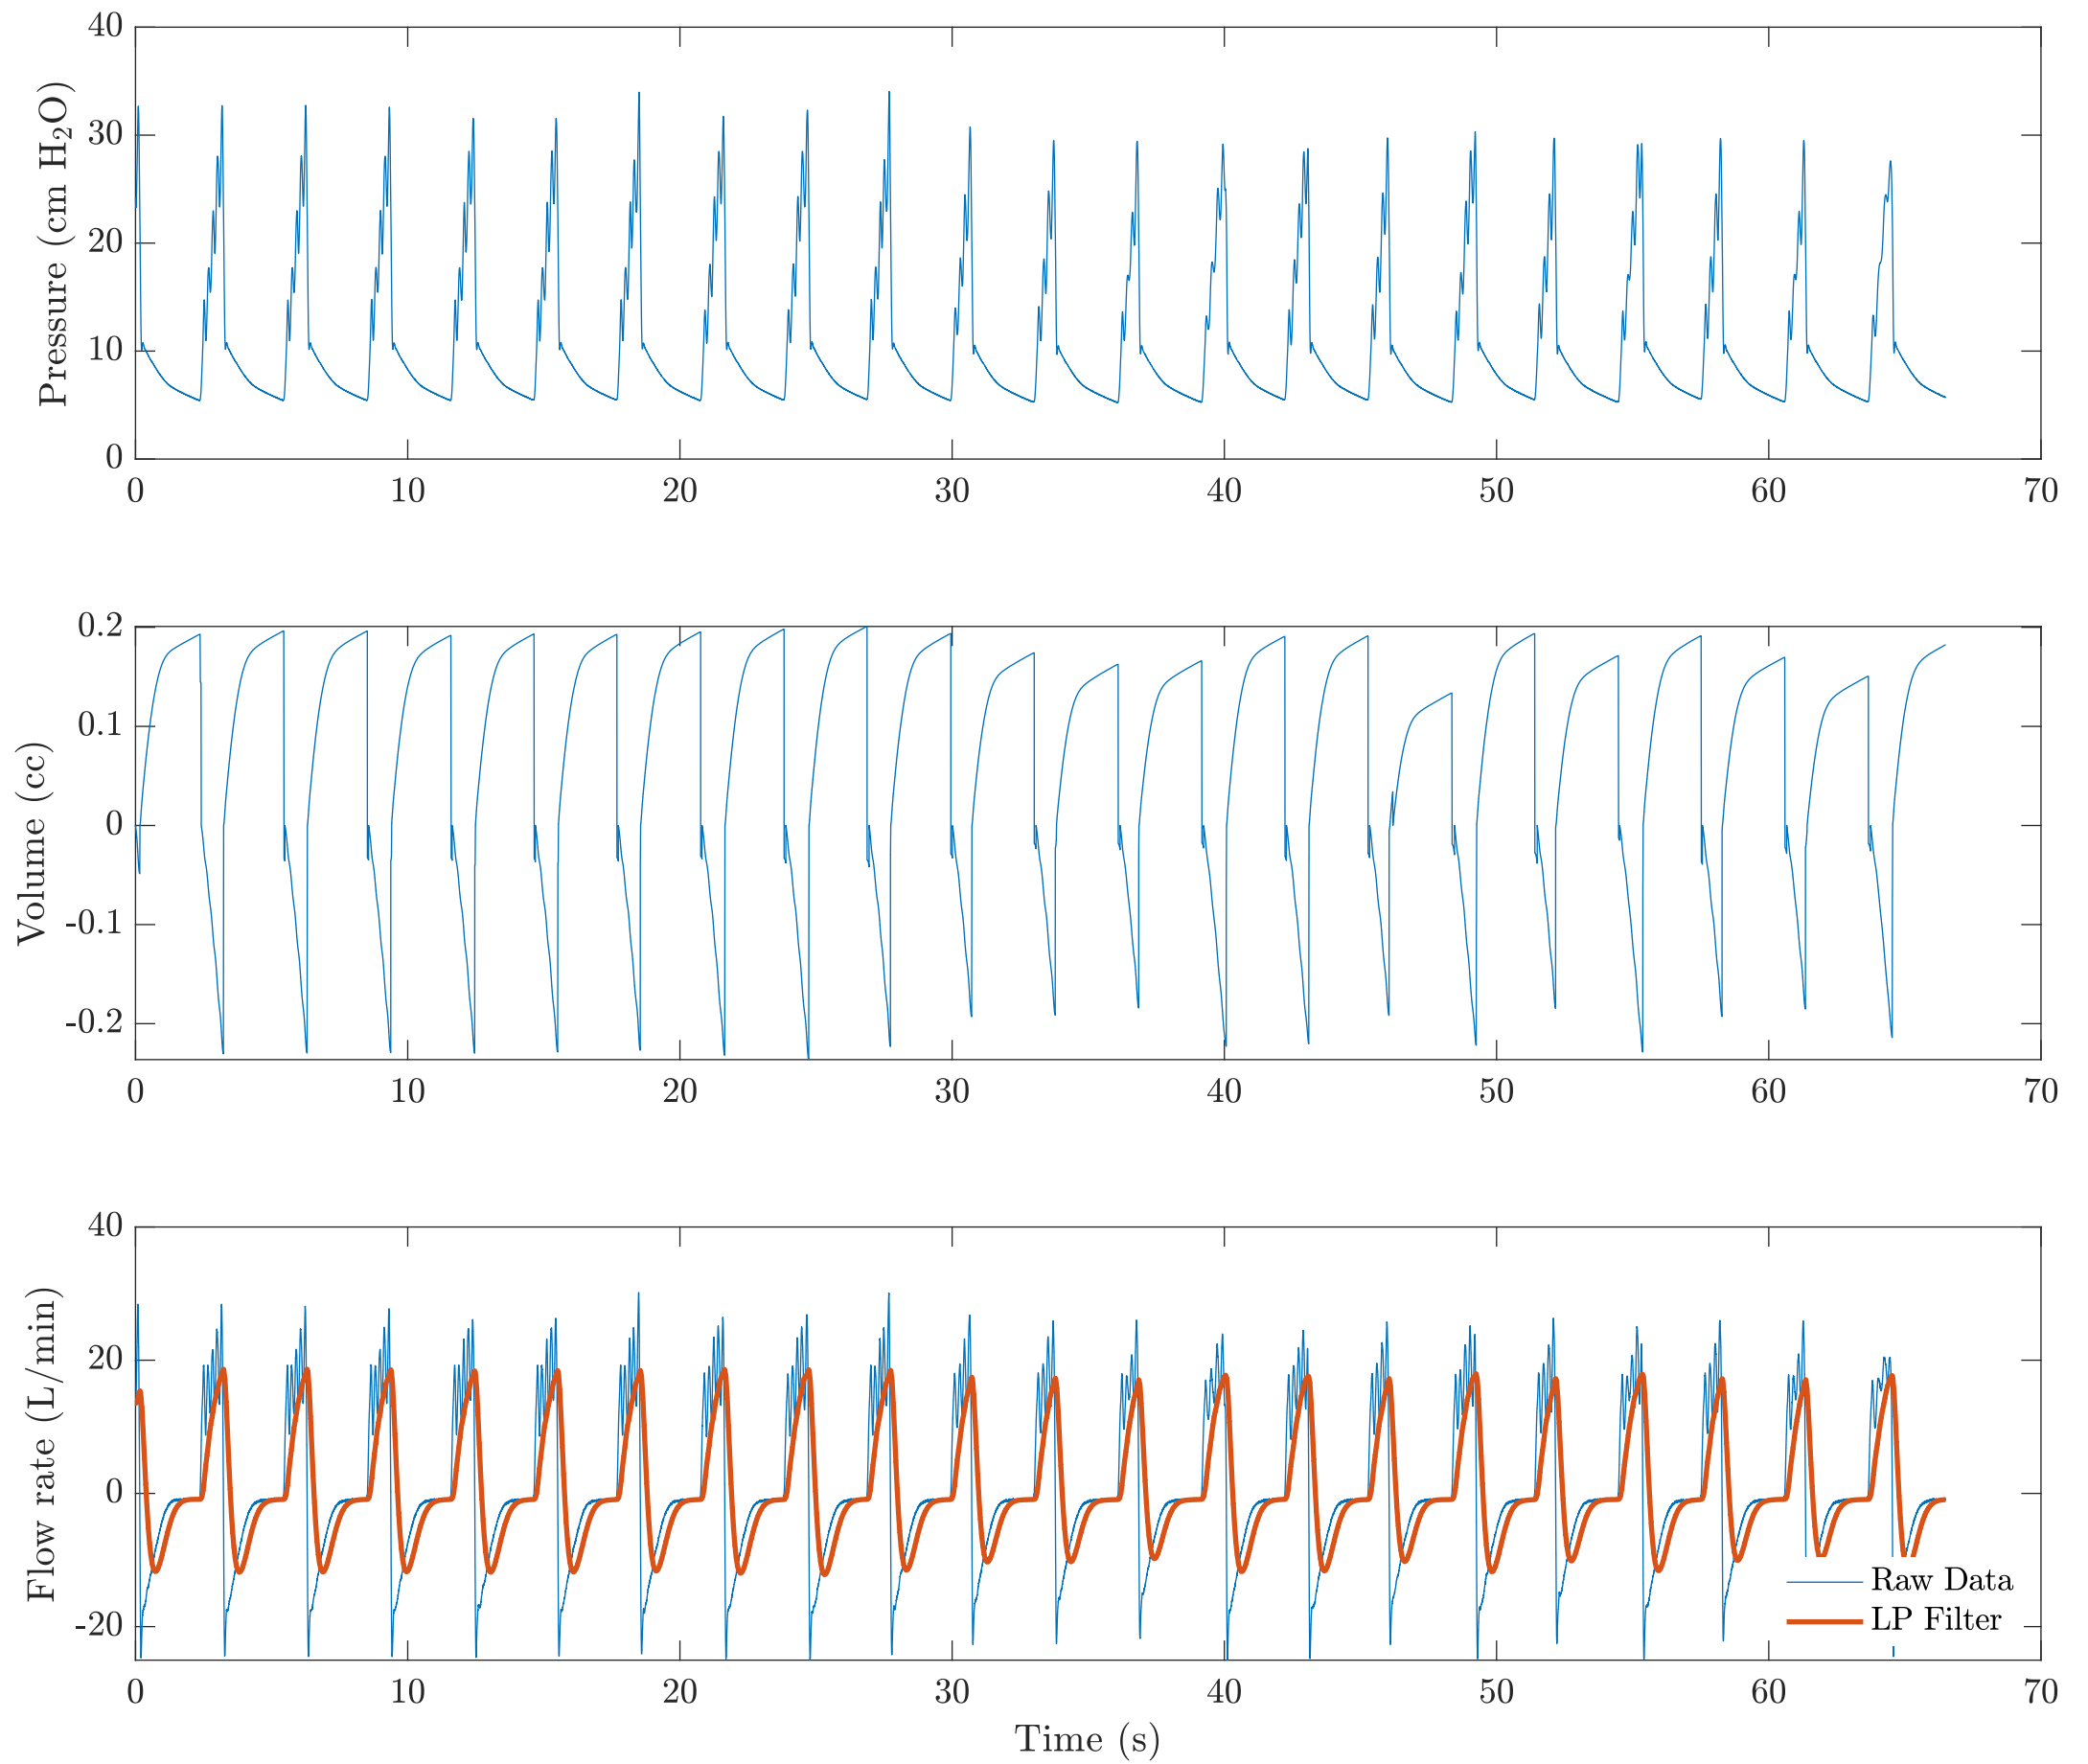

TEST 10

